


CADCHM350-SERIES

cAUs E501953

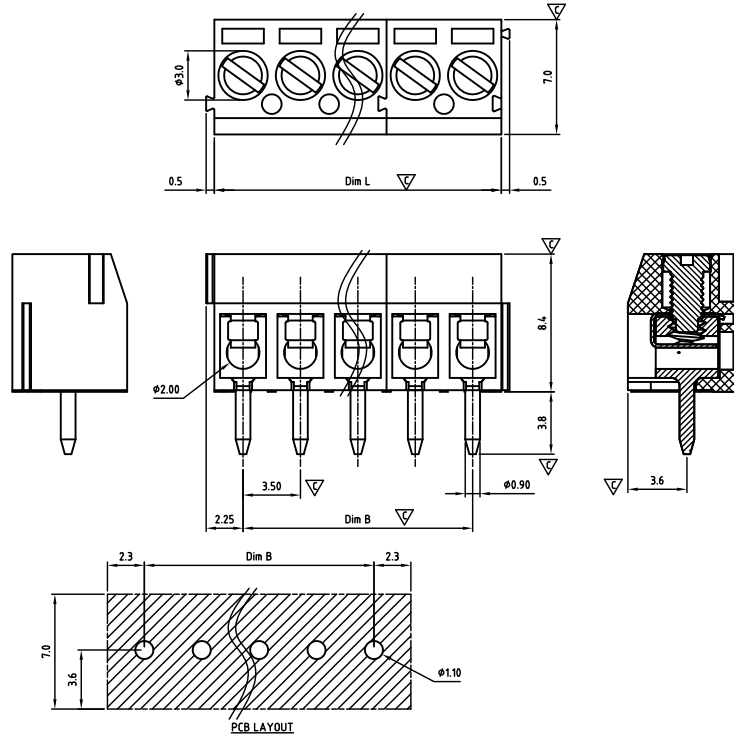

Critical dimension: ∇

Dim.L=Px3.5		
Dim.B=(P-1)x3.5		
P=Number of poles (02-24)		
	Dim B	Dim L
0-30mm	+/- 0,15	+/- 0,20
over 30-60mm	+/- 0,20	+/- 0,25
over 60-90mm	+/- 0,25	+/- 0,30
over 90mm	+/- 0,30	+/- 0,40

Tolerance	
x.	+/- 0,50
x.x	+/- 0,30
x.xx	+/- 0,10
x°	+/- 1°
	Units:mm

Technical data

Technical data in accordance with UL/cUL

	Use Group	B	C	D
Nominal voltage (V)	300	-	-	-
Nominal current (A)	10	-	-	-
Connection capacity (AWG)	26-16	-	-	-

Technical data in accordance with IEC and VDE

Rated insulation voltage at pollution degree 2 (V)	200		
Rated current/conductor cross-section (A/mm ²)	10 / 1.5		
Solid/stranded(mm ²)	0.14-1.5 / 0.14-1.5		
Surge voltage category/pollution degree	III / 3	III / 2	II / 2
Rated insulation voltage(V)	160	200	400
Rated surge voltage(kV)	2.5	2.5	2.5

General data

Stripping length(mm)	5-6
Screw thread	M2.0
Tightening torque(Nm)	0.20-0.22
Insulation Withstanding Voltage	AC 1600 / 1min
Insulation Resistance	1000M Ω or more at DC500V
Using temperature range	-40°C-115°C

Materials

Insulation material group	PA 66 I UL94 -V0
Wire guard	Stainless steel
Cage	Brass, Sn plated
Screw	Steel, Zn plated

Packing information

Poles	Order Number	SPQ
2	CADCHM35002x000	1340
3	CADCHM35003x000	980
4	CADCHM35004x000	800
5	CADCHM35005x000	600
6	CADCHM35006x000	490
7	CADCHM35007x000	360
8	CADCHM35008x000	300
9	CADCHM35009x000	240
10	CADCHM35010x000	220
11	CADCHM35011x000	165
12	CADCHM35012x000	165
13	CADCHM35013x000	165
14	CADCHM35014x000	165
15	CADCHM35015x000	165
16	CADCHM35016x000	165
17	CADCHM35017x000	165
18	CADCHM35018x000	165
19	CADCHM35019x000	165
20	CADCHM35020x000	150
21	CADCHM35021x000	150
22	CADCHM35022x000	130
23	CADCHM35023x000	130
24	CADCHM35024x000	130

Ordering code

CADC HM 350 xx x xxx

① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (02-24)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black	5 Green
1 Brown	6 Blue
2 Red	G Pale grey
3 Orange	8 Dark grey
4 Yellow	9 White

Key Commercial data

Custom tariff number	8536901100
Country of origin	CN (China)

