




CAWA03500-SERIES

Pitch 5,00mm

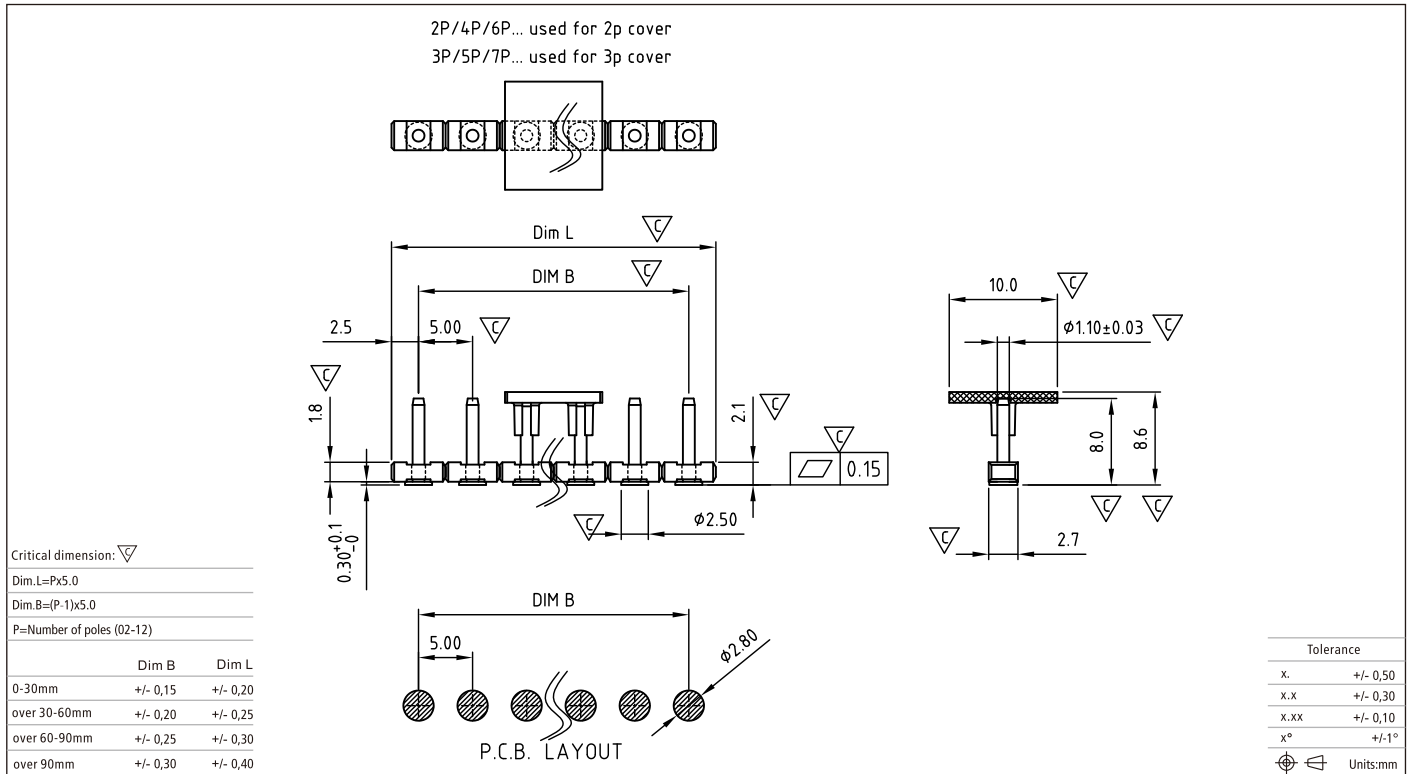

Technical data

Technical data in accordance with UL/CUL

	Use Group	B	C	D
Nominal voltage (V)		300	-	-
Nominal current (A)		10	-	-
Connection capacity(AWG)		-	-	-

Technical data in accordance with IEC

Rated insulation voltage at pollution degree 2 (V)		320		
Rated current/conductor cross-section (A/mm ²)		12 / -		
Solid/stranded(mm ²)		-		
Surge voltage category/pollution degree	III / 3	III / 2	II / 2	
Rated insulation voltage(V)	250	320	400	
Rated surge voltage(kV)	4	4	4	

General data

Flange nut thread	-
Flange nut tightening torque(Nm)	-
Insulation Withstanding Voltage	AC 1600 /1min
Insulation Resistance	1000MΩ or more at DC500V
Using temperature range	-40°C-115°C
Soldering temperature	260±5°C/10s

Materials

Insulation material group	PA 6T UL94 -V0
PIN	Brass, Tin plated
Flange nut	-
Borehole diameter/pin dimensions(mm)	1.4/φ 1.1

Packing information

Poles	Order Number	SPQ
2	CAWA0350002x000	250
3	CAWA0350003x000	250
4	CAWA0350004x000	250
5	CAWA0350005x000	250
6	CAWA0350006x000	250
7	CAWA0350007x000	250
8	CAWA0350008x000	250
9	CAWA0350009x000	250
10	CAWA0350010x000	250
11	CAWA0350011x000	250
12	CAWA0350012x000	250

Ordering code

CAWA 03 500 xx x xxx

① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (02-12)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black

Key Commercial data

Custom tariff number	8536901000
Country of origin	CN (China)

Mating with headers

CANFST500 Series

