


PCB BARRIER SCREW TERMINAL BLOCK

CAZABB762-SERIES

cULus E501953

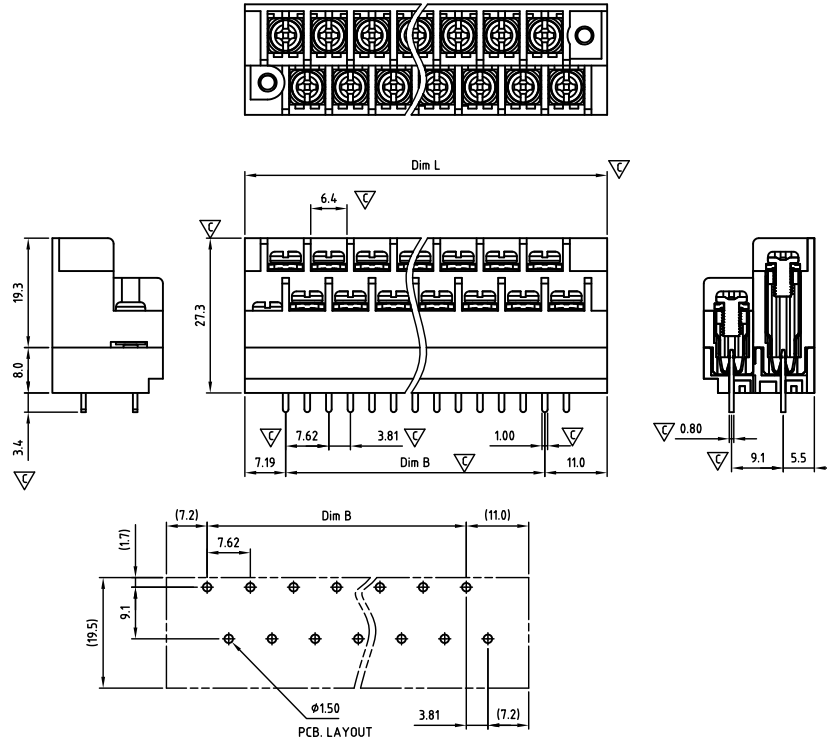

Critical dimension: ∇

Dim.L=(P-1)x7.62+18.19		
Dim.B=(P-1)x7.62		
P=1/2 Number of poles (04-24)		
	Dim B	Dim L
0-30mm	+/- 0,15	+/- 0,20
over 30-60mm	+/- 0,20	+/- 0,25
over 60-90mm	+/- 0,25	+/- 0,30
over 90mm	+/- 0,30	+/- 0,40

Tolerance	
x.	+/- 0,50
x.x	+/- 0,30
x.xx	+/- 0,10
x ^o	+/-1 ^o
Units:mm	

Technical data

Technical data in accordance with UL/CUL

	Use Group	B	C	D
Nominal voltage (V)		300	-	300
Nominal current (A)		15	-	10
Connection capacity (AWG)		22-12	-	22-12

Technical data in accordance with IEC

Rated insulation voltage at pollution degree 2 (V)	
Rated current/conductor cross-section (A/mm ²)	
Solid/stranded(mm ²)	
Surge voltage category/pollution degree	
Rated insulation voltage(V)	
Rated surge voltage(kV)	

General data

Stripping length(mm)		5-6
Screw thread		M3
Tightening torque(lb-in)		7
Insulation Withstanding Voltage		AC 1600 / 1min
Insulation Resistance		1000M Ω or more at DC500V
Using temperature range		-40 ^o C-115 ^o C
Soldering temperature		250 \pm 5 ^o C/5s

Materials

Insulation material group		PA 66 I UL94 -V0
Contact		C5210, Tin plated
Screw		Steel, Ni plated

Packing information

Poles	Order Number	SPQ
2*2	CAZABB76204x000	72
2*3	CAZABB76206x000	45
2*4	CAZABB76208x000	45
2*5	CAZABB76210x000	36
2*6	CAZABB76212x000	30
2*7	CAZABB76214x000	27
2*8	CAZABB76216x000	24
2*9	CAZABB76218x000	24
2*10	CAZABB76220x000	15
2*11	CAZABB76222x000	15
2*12	CAZABB76224x000	15

Ordering code

CAZA BB 762 xx x xxx

① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (04-24)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black

Key Commercial data

Custom tariff number	8536901000
Country of origin	CN (China)