


CAZBAB950-SERIES

Pitch 9,50mm

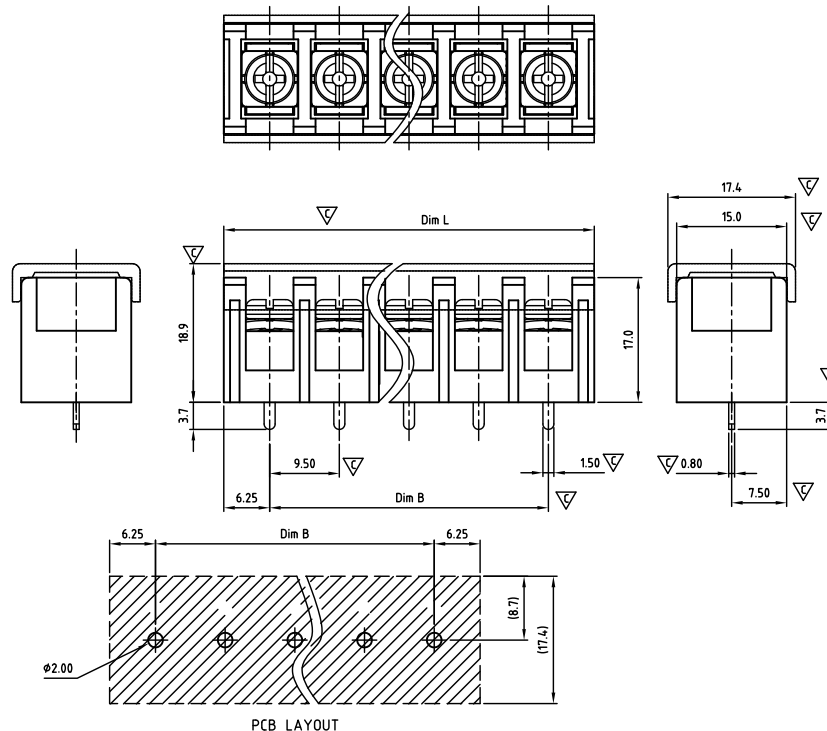

Critical dimension: ∇

Dim.L=Px9.50+3.0		
Dim.B=(P-1)x9.50		
P=Number of poles (02-16)		
	Dim B	Dim L
0-30mm	+/- 0,15	+/- 0,20
over 30-60mm	+/- 0,20	+/- 0,25
over 60-90mm	+/- 0,25	+/- 0,30
over 90mm	+/- 0,30	+/- 0,40

Tolerance	
x.	+/- 0,50
x.x	+/- 0,30
x.xx	+/- 0,10
x°	+/- 1°
ϕ	Units:mm

Technical data

Technical data in accordance with UL/CUL

	Use Group	B	C	D
Nominal voltage (V)		300	-	300
Nominal current (A)		20	-	10
Connection capacity(AWG)		22-12	-	22-12

Technical data in accordance with IEC

Rated insulation voltage at pollution degree 2 (V)	
Rated current/conductor cross-section (A/mm ²)	
Solid/stranded(mm ²)	
Surge voltage category/pollution degree	
Rated insulation voltage(V)	
Rated surge voltage(kV)	

General data

Stripping length(mm)	7-8
Screw thread	M3
Tightening torque(lb-in)	12
Insulation Withstanding Voltage	AC 1600 / 1min
Insulation Resistance	1000M Ω or more at DC500V
Using temperature range	-40°C-115°C
Soldering temperature	250±5°C/5s

Materials

Insulation material group	PA 66 I UL94 -V0
Contact	Brass, Tin plated
Screw	Steel, Zn plated

Packing information

Poles	Order Number	SPQ
2	CAZBAB95002x000	120
3	CAZBAB95003x000	90
4	CAZBAB95004x000	60
5	CAZBAB95005x000	60
6	CAZBAB95006x000	48
7	CAZBAB95007x000	36
8	CAZBAB95008x000	36
9	CAZBAB95009x000	30
10	CAZBAB95010x000	30
11	CAZBAB95011x000	24
12	CAZBAB95012x000	24
13	CAZBAB95013x000	15
14	CAZBAB95014x000	15
15	CAZBAB95015x000	15
16	CAZBAB95016x000	15

Ordering code

CAZB AB 950 xx x xxx

① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (02-16)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black

Key Commercial data

Custom tariff number	8536901000
Country of origin	CN (China)

