


CAZCAA825-SERIES

cULus E501953

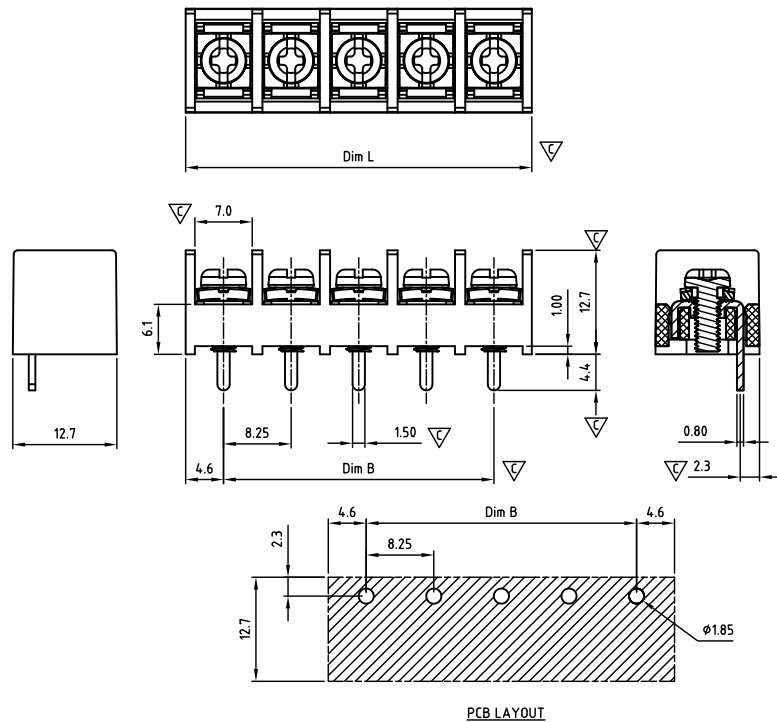

Critical dimension: ∇

Dim.L=(P-1)x8.25+9.25
Dim.B=(P-1)x8.25
P=Number of poles (02-24)

	Dim B	Dim L
0-30mm	+/- 0,15	+/- 0,20
over 30-60mm	+/- 0,20	+/- 0,25
over 60-90mm	+/- 0,25	+/- 0,30
over 90mm	+/- 0,30	+/- 0,40

Tolerance	
x.	+/- 0,50
x.x	+/- 0,30
x.xx	+/- 0,10
x°	+/- 1°

Units:mm

Technical data

Technical data in accordance with UL/CUL

	Use Group	B	C	D
Nominal voltage (V)		300	-	300
Nominal current (A)		20	-	10
Connection capacity(AWG)		26-12	-	26-12

Technical data in accordance with IEC

Rated insulation voltage at pollution degree 2 (V)	
Rated current/conductor cross-section (A/mm ²)	
Solid/stranded(mm ²)	
Surge voltage category/pollution degree	
Rated insulation voltage(V)	
Rated surge voltage(kV)	

General data

Stripping length(mm)	6-7
Screw thread	M3
Tightening torque(lb-in)	10
Insulation Withstanding Voltage	AC 1600 / 1min
Insulation Resistance	1000M Ω or more at DC500V
Using temperature range	-40°C-115°C
Soldering temperature	250±5°C/5s

Materials

Insulation material group	PC I UL94 -V0
Contact	Brass, Tin plated
Screw	Steel, Zn plated

Packing information

Poles	Order Number	SPQ
2	CAZCAA82502x000	360
3	CAZCAA82503x000	180
4	CAZCAA82504x000	180
5	CAZCAA82505x000	110
6	CAZCAA82506x000	84
7	CAZCAA82507x000	80
8	CAZCAA82508x000	60
9	CAZCAA82509x000	55
10	CAZCAA82510x000	72
11	CAZCAA82511x000	50
12	CAZCAA82512x000	40
13	CAZCAA82513x000	40
14	CAZCAA82514x000	40
15	CAZCAA82515x000	25
16	CAZCAA82516x000	25
17	CAZCAA82517x000	25
18	CAZCAA82518x000	25
19	CAZCAA82519x000	25
20	CAZCAA82520x000	25
21	CAZCAA82521x000	25
22	CAZCAA82522x000	25
23	CAZCAA82523x000	25
24	CAZCAA82524x000	25

Ordering code

CAZC AA 825 xx x xxx

① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (02-24)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black

Key Commercial data

Custom tariff number	8536901000
Country of origin	CN (China)

