




CASDVD250-SERIES

cAUs E501953

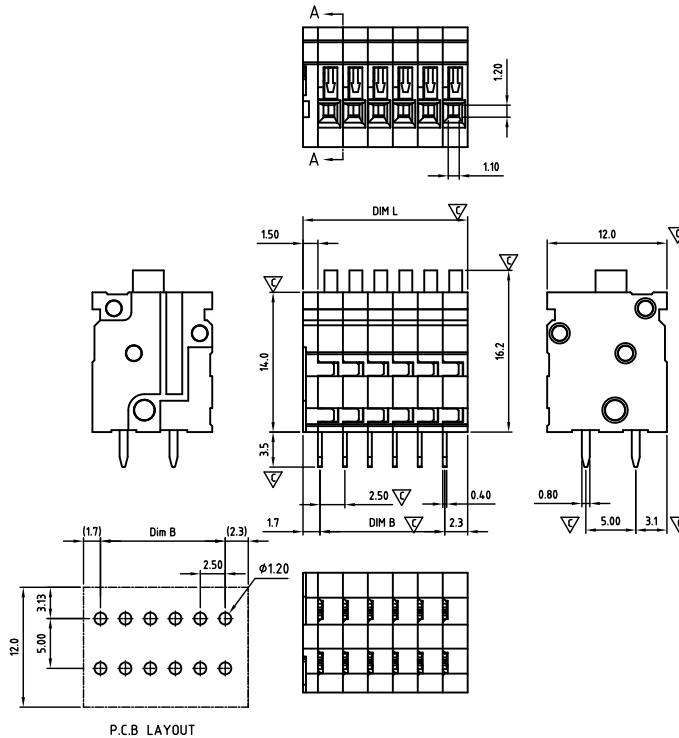

Critical dimension: ▽

Dim.L=Px2.5+1.5		
Dim.B=(P-1)x2.5		
P=Number of poles (01-24)		
	Dim B	Dim L
0-30mm	+/- 0,15	+/- 0,20
over 30-60mm	+/- 0,20	+/- 0,25
over 60-90mm	+/- 0,25	+/- 0,30
over 90mm	+/- 0,30	+/- 0,40

Tolerance	
x.	+/- 0,50
x.x	+/- 0,30
x.xx	+/- 0,10
x°	+/- 1°
Units:mm	

Technical data

Technical data in accordance with UL/CUL

	Use Group	B	C	D
Nominal voltage (V)	150	-	-	-
Nominal current (A)	6	-	-	-
Connection capacity(AWG)	26-18	-	-	-

Technical data in accordance with IEC

Rated insulation voltage at pollution degree 2 (V)	160		
Rated current/conductor cross-section (A/mm ²)	4 / 0.5		
Solid/stranded(mm ²)	0.14-0.5 / 0.14-0.5		
Surge voltage category/pollution degree	III / 3	III / 2	II / 2
Rated insulation voltage(V)	63	160	320
Rated surge voltage(kV)	2.5	2.5	2.5

General data

Stripping length(mm)	10-11
Borehole diameter/pin dimensions(mm)	1.2/0.4*0.8

Materials

Insulation material group	PA 66 I
Inflammability class acc.To UI94	V0
Contact	Brass, Sn plated
Wire guard	Stainless steel

Packing information

Poles	Order Number	SPQ
2	CASDVD25002x000	500
3	CASDVD25003x000	420
4	CASDVD25004x000	360
5	CASDVD25005x000	320
6	CASDVD25006x000	285
7	CASDVD25007x000	240
8	CASDVD25008x000	215
9	CASDVD25009x000	190
10	CASDVD25010x000	165
11	CASDVD25011x000	165
12	CASDVD25012x000	140
13	CASDVD25013x000	120
14	CASDVD25014x000	120
15	CASDVD25015x000	120
16	CASDVD25016x000	95
17	CASDVD25017x000	95
18	CASDVD25018x000	95
19	CASDVD25019x000	95
20	CASDVD25020x000	70
21	CASDVD25021x000	70
22	CASDVD25022x000	70
23	CASDVD25023x000	70
24	CASDVD25024x000	70

Ordering code

CASDVD 250 xx x xxx
① ② ③ ④ ⑤ ⑥

- ① Type
- ② Product style
- ③ Pitch
- ④ Poles (01-24)
- ⑤ Color
- ⑥ Standard 000 or Custom XXX

Color

0 Black	5 Green
1 Brown	6 Blue
2 Red	G Pale grey
3 Orange	8 Dark grey
4 Yellow	9 White

Key Commercial data

Custom tariff number	8536901000
Country of origin	CN (China)



Pitch 2,50mm